



Tank

Volume	12 m ³
Operating pressure	0.5 bar
End cover	Hydraulic, fully automatic

A pneumatically moved partition divides the tank in two variable sizes keeping sludge and water separated.

Partition positions	3, fixed
Locking bolts	3 sets, manual
Tank level indicator	2, sludge & water
Suction valves top	4", manual
Suction valves bottom	6", manual
Water filling valve	2"

High-pressure system

Pump model	Uraca KD 718G
Pump capacity	390 l/min @ 140 bar
Jetting hose reel	Hydraulic
Hose size	5/4" 150 m
Hose size	3/4" 50 m + 1/2" 60 m

Vacuum system

Pump model	CVS Vacustar W1600
Pump capacity	26,666 l/min @ free flow
Max. vacuum	90%
Suction cassette	Hydraulic
Suction hose diameter	5"
Telescope extension	2 m

Controls

Controller	CAN bus
Control panels	3 pcs.

Storage

Cabinets, double	2 pcs.
Comfort cabinet	Inside double cabinet. Warm water, mirror, soap, paper holder.
Tool cabinets	1 pcs.
Hose shelves	2 pcs.
Tool shelves	2 pcs.


Lights

Work lamps	5 pcs., LED
Flash lights	2 pcs., LED
Flash bar	1 pcs., LED
Side lights	6 pcs., LED

Accessories

- One nozzle set
- One vice
- Blow out air hose with couplings for jetting system draining
- 1.5 m 3" hose with coupling for cleaning filter unit
- One set of cover hooks
- One end cover safety support
- 5" cassette suction pipe

Contact us for more information.

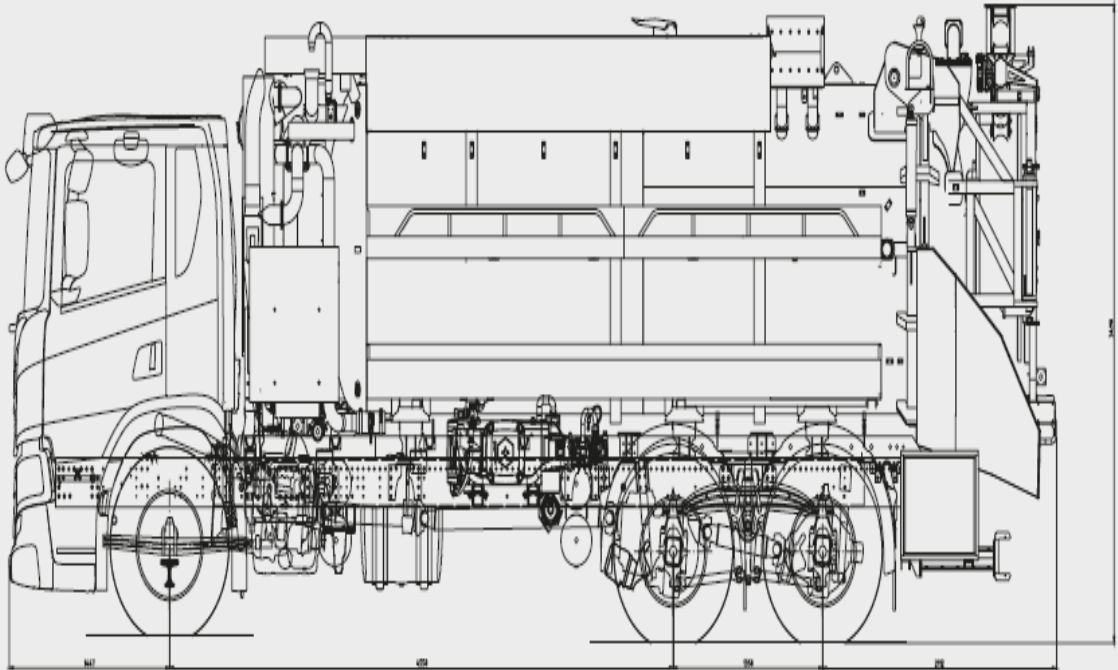

Dimensions and weight

Length	9,459 mm
Width	2,550 mm
Height	3,490 mm
Wheelbase	4,550 mm
GVW	26,000 kg
TARE weight	Approx. 18,320 kg

Transmission

Power take-off	From engine and/or gearbox
Jetting pump	Belt driven
Vacuum pump	Hydraulic driven

Engine

Type	DC13 162
Horse power	370 HP
Emission level	Euro 6
Fuel	Diesel

Chassis

Scania	P 370 B6x4NZ
Cab type	CP17L
Mudguards	Plastic
Cyclist protection	Alu. bars on each side
Protection grilles	On rear lights

Finish

Undercarriage and components	Grey
Cabin and tank	White
Cabinets and shelves	Anodised
Sign plates	3 pcs.
Text and stripping	Invoiced separately